


4.3-10 Coaxial Fixed Attenuator, R3P2-XX
DC-3GHz, 2W, 1-30dB, Bidirectional, Round

01

Dimensions(mm) Tolerance±1%

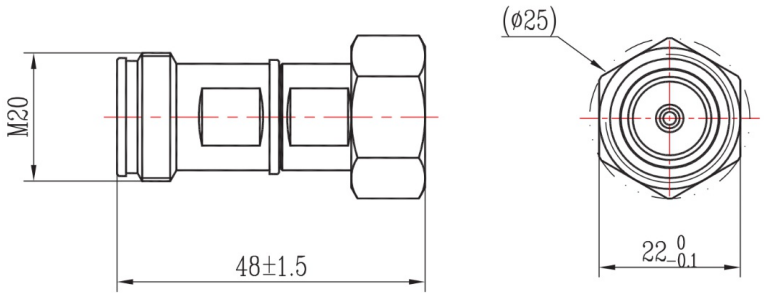

02

Electrical & Environmental

Frequency Range	DC-3GHz , 50Ohms
VSWR	1.2 Max
Input Avg Power	2W @25°C
Peak Power	200W (5μsec pulse width, 0.5% duty cycle)
Temp Coefficient	<0.0004 dB/dB/°C
Direction	Bidirectional, 4.3-10 male to 4.3-10 female
Attenuation	1-30dB
Operating Temp	-55°C~+125°C

03

Mechanical & Product Information

Product Number	R3P2-XX
Product Type	Coaxial Fixed Attenuator, P-Grade
Connector	4.3-10 male, 4.3-10 female
Connector Body	Ternary alloy plated brass
Center Contact	Gold plated brass，Gold plated beryllium copper
Heat Sink	N/A
Net Weight	About 60.0g

Product Selection		
RFTOP P/N	**ATTEN**	**Accuracy**
R3P2-3	3 dB	±0.3 dB
R3P2-6	6 dB	±0.3 dB
R3P2-10	10 dB	±0.5 dB
R3P2-20	20 dB	±0.6 dB
R3P2-30	30 dB	±0.8 dB

Notes: Pay attention to input/output. To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 80°C. Reference Curve,derate linearly to 0.2W at 100°C.

