


BNC Coaxial Fixed Attenuator, R6B25FF-XX
DC-6GHz, 25W, 1-60dB, Unidirectional, Round

01

Dimensions(mm) Tolerance±1%

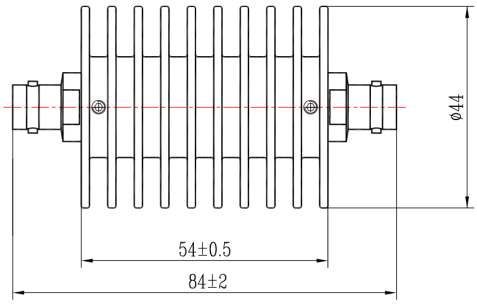

02

Electrical & Environmental

Frequency Range	DC-6GHz , 50Ohms
VSWR	1.25 Max
Input Avg Power	25W @25℃
Peak Power	500W (5μsec pulse width, 2.5% duty cycle)
Temp Coefficient	<0.0004 dB/dB/℃
Direction	Unidirectional, BNC female imput to BNC female output
Attenuation	1-60dB
Operating Temp	-55℃~+125℃


03

Mechanical & Product Information

Product Number	R6B25FF-XX
Product Type	Coaxial Fixed Attenuator, P-Grade
Connector	BNC female, BNC female
Connector Body	Ternary alloy plated brass
Center Contact	Gold plated beryllium copper
Heat Sink	Black anodized aluminum
Net Weight	About 125.0g

Product Selection		
RFTOP P/N	**ATTEN**	**Accuracy**
R6B25FF-3	3 dB	±0.5 dB
R6B25FF-6	6 dB	±0.5 dB
R6B25FF-10	10 dB	±0.5 dB
R6B25FF-20	20 dB	±0.6 dB
R6B25FF-30	30 dB	±0.8 dB
R6B25FF-40	40 dB	±0.8 dB
R6B25FF-50	50 dB	±0.8 dB
R6B25FF-60	60 dB	±0.9 dB

Notes: Pay attention to input/output. To ensure longevity and performance, do not use at full power for a long time. Peak power, pulse width, and duty cycle need to meet the requirements. Input high power, require heat dissipation, maintain temperature within 60℃. Reference Curve,derate linearly to 3W at 100℃.





BNC Coaxial Fixed Attenuator, R6B25FF-XX
DC-6GHz, 25W, 1-60dB, Unidirectional, Round

04 Typical Test Data

30dB

