


# SMA Female to SMB Male, Adapter, RA06S05-GBA DC-6GHz

## 01 Dimensions(mm) Tolerance±1%

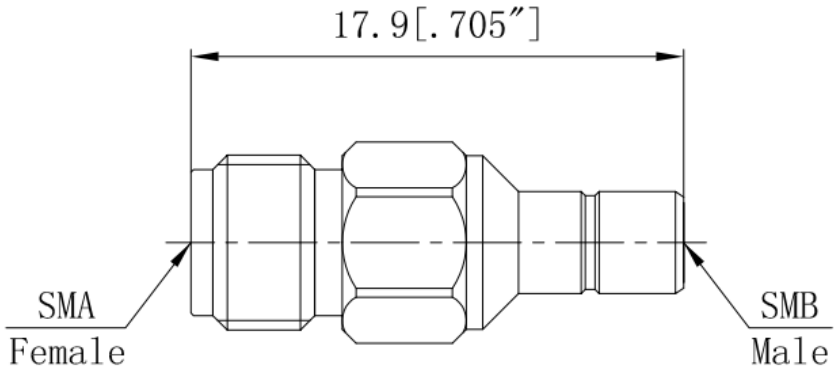


## 02 Electrical & Environmental

| | | | |
|---|---|---|---|
| **Frequency Range** | DC-6GHz | **Impedance** | 50 ohm |
| **VSWR** | 1.2 max | **Insertion Loss** | - |

## 03 Mechanical & Product Information

| | | | |
|---|---|---|---|
| **Product Number** | RA06S05-GBA, E-Grade | **Connector** | SMA Female to SMB Male |
| **Connector Body** | Gold plated brass | **Shape/Mounting** | Straight, None |
| **Center Contact** | Gold plated beryllium copper | **Insulator** | PTFE |
| **Dimension** | 17.9(L)mm | **Net Weight** | - |

## 04 Typical Test Data

