


SMA Female to SMB Female, Adapter, RA06S14-GBA DC-6GHz

01 Dimensions(mm) Tolerance±1%

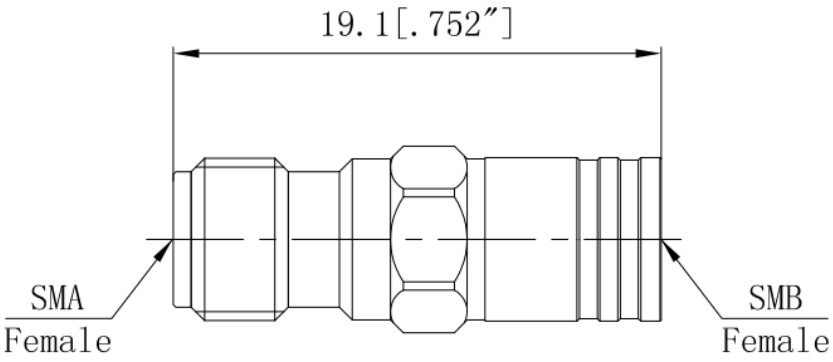

02 Electrical & Environmental

Frequency Range	DC-6GHz	**Impedance**	50 ohm
VSWR	1.2 max	**Insertion Loss**	0.20dB max

03 Mechanical & Product Information

Product Number	RA06S14-GBA, E-Grade	**Connector**	SMA Female to SMB Female
Connector Body	Gold plated brass	**Shape/Mounting**	Straight, None
Center Contact	Gold plated beryllium copper	**Insulator**	PTFE
Dimension	19.1(L)mm	**Net Weight**	-

04 Typical Test Data

