


N Female to SMA Male, Adapter, RA18N18FH-TBA
DC-18GHz, 4 hole flange

01 Dimensions(mm) Tolerance±1%

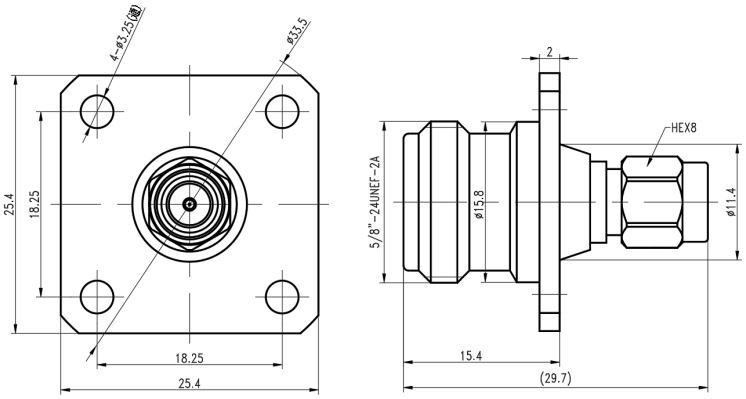

02 Electrical & Environmental

Frequency Range	DC-18GHz	**Impedance**	50 ohm
VSWR	1.2 max , Typ 1.15	**Insertion Loss**	0.20dB max ≤0.04√f(GHz)dB

03 Mechanical & Product Information

Product Number	RA18N18FH-TBA, U-Grade	**Connector**	N Female to SMA Male
Connector Body	Ternary alloy plated brass & Gold plated brass	**Shape/Mounting**	Straight, 4 hole flange
Center Contact	Gold plated beryllium copper	**Insulator**	PTFE
Dimension	29.7(L)mm	**Net Weight**	About 27.8g

04 Typical Test Data

