


QSMA Male to SMA Female, Adapter, RA18S03QE
DC-18GHz, Quick Plug

01 Dimensions(mm) Tolerance±1%

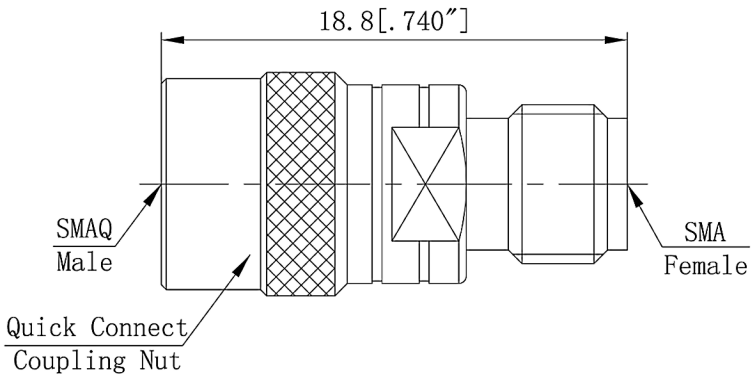

02 Electrical & Environmental

Frequency Range	DC-18GHz	**Impedance**	50 ohm
VSWR	1.2 max	**Insertion Loss**	-
Mating Cycles	>500 Cycles	**OT Range**	-55°C to +165°C

03 Mechanical & Product Information

Product Number	RA18S03QE, E-Grade	**Connector**	QSMA Male to SMA Female
Connector Body	Passivated stainless steel	**Shape/Mounting**	Straight, Quick Plug
Center Contact	Gold plated beryllium copper	**Insulator**	PTFE
Dimension	18.8(L)mm	**Net Weight**	About 4.4g

04 Typical Test Data

