


QSMA Male to SMA Female, Adapter, RA18S03Q DC-18GHz, Quick Plug

01 Dimensions(mm) Tolerance±1%

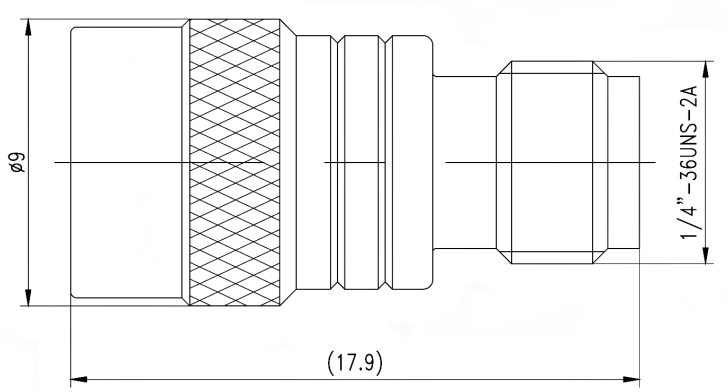


02 Electrical & Environmental

Frequency Range	DC-18GHz	**Impedance**	50 ohm
VSWR	1.15 max	**Insertion Loss**	0.08dB max ≤0.04√f(GHz)dB

03 Mechanical & Product Information

Product Number	RA18S03Q, U-Grade	**Connector**	QSMA Male to SMA Female
Connector Body	Passivated stainless steel & BeCu	**Shape/Mounting**	Straight, Quick Plug
Center Contact	1.27μm gold plated beryllium copper	**Insulator**	PTFE
Dimension	17.9(L)*9(ϕ)mm	**Net Weight**	-

04 Typical Test Data

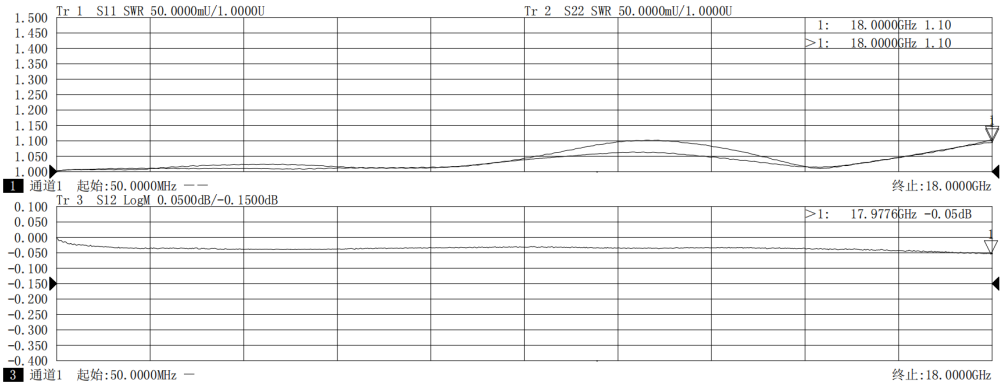

	扫描类型	起始频率	终止频率	扫描点数	中频带宽(Hz)	扫描时间(s)	端口1,2功率(dBm)
通道1	线性扫描	0.050000000GHz	18.000000000GHz	801	1000	0.757065	-5.0,-5.0