
SMA Female to QSSMA Male, Adapter, RA18S06Q
DC-18GHz



01 Dimensions(mm) Tolerance±1%

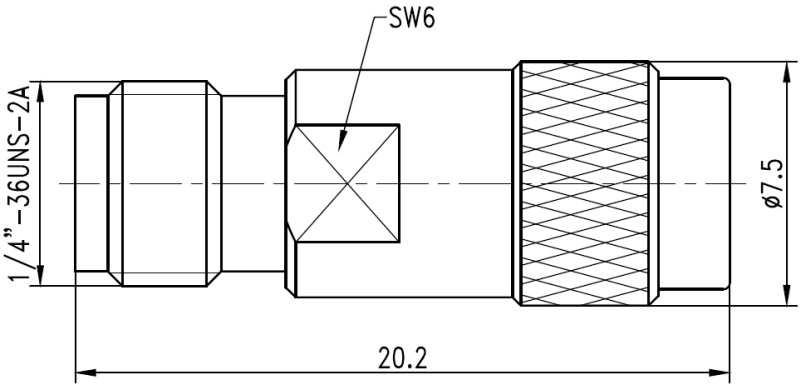

02 Electrical & Environmental

Frequency Range	DC-18GHz	**Impedance**	50 ohm
VSWR	1.15 max	**Insertion Loss**	0.30dB max ≤0.07√f(GHz)dB

03 Mechanical & Product Information

Product Number	RA18S06Q, U-Grade	**Connector**	SMA Female to QSSMA Male
Connector Body	Passivated stainless steel 316F & BeCu	**Shape/Mounting**	Straight, None
Center Contact	1.27μm gold plated beryllium copper	**Insulator**	PTFE
Dimension	20.2(L)*7.5(ϕ)mm	**Net Weight**	About 4.0g

04 Typical Test Data

