
1.85mm Female to SMA Female, Adapter, RA18S31 DC-26.5GHz



01 Dimensions(mm) Tolerance±1%

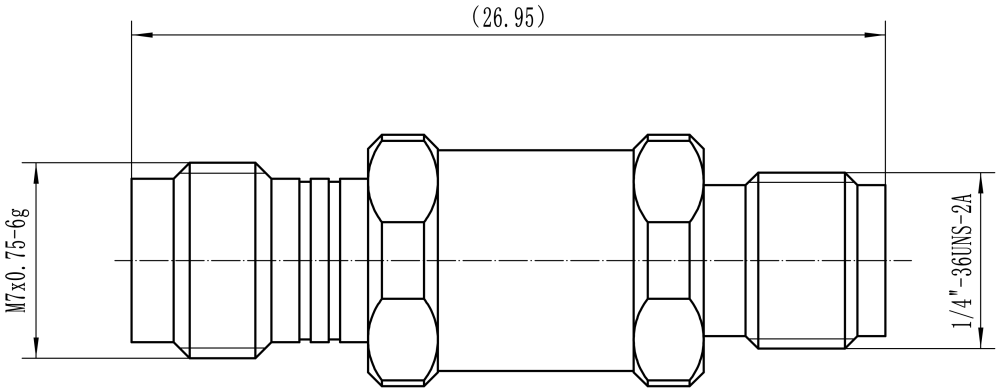

02 Electrical & Environmental

Frequency Range	DC-26.5GHz	**Impedance**	50 ohm
VSWR	1.2 max , Typ 1.15	**Insertion Loss**	-

03 Mechanical & Product Information

Product Number	RA18S31, P-Grade	**Connector**	1.85mm Female to SMA Female
Connector Body	Passivated stainless steel	**Shape/Mounting**	Straight, None
Center Contact	Gold plated beryllium copper	**Insulator**	PEI&PTFE
Dimension	26.95(L)mm	**Net Weight**	-

04 Typical Test Data

