
SMA Male to BMA Female, Adapter, RA18S36 DC-18GHz



01 Dimensions(mm) Tolerance±1%

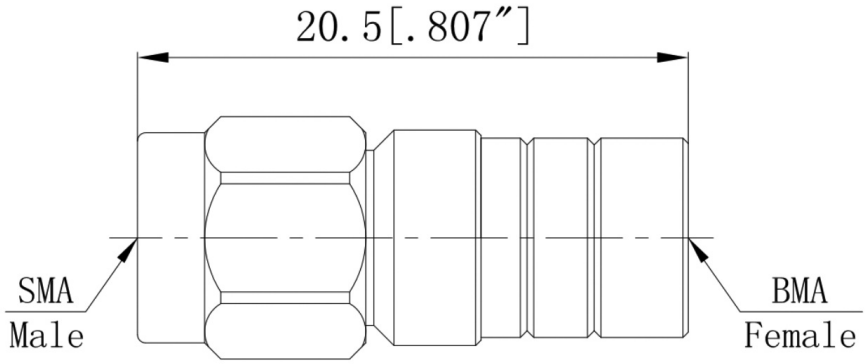

02 Electrical & Environmental

Frequency Range	DC-18GHz	**Impedance**	50 ohm
VSWR	1.2 max	**Insertion Loss**	-
Mating Cycles	>500 Cycles	**OT Range**	-55°C to +165°C

03 Mechanical & Product Information

Product Number	RA18S36, P-Grade	**Connector**	SMA Male to BMA Female
Connector Body	Passivated stainless steel	**Shape/Mounting**	Straight, None
Center Contact	Gold plated beryllium copper	**Insulator**	PEI&PTFE
Dimension	20.5(L)mm	**Net Weight**	-

04 Typical Test Data

