
# 3.5mm Female to 2.4mm Female, Adapter, RA3410 DC-34GHz



## 01 Dimensions(mm) Tolerance±1%

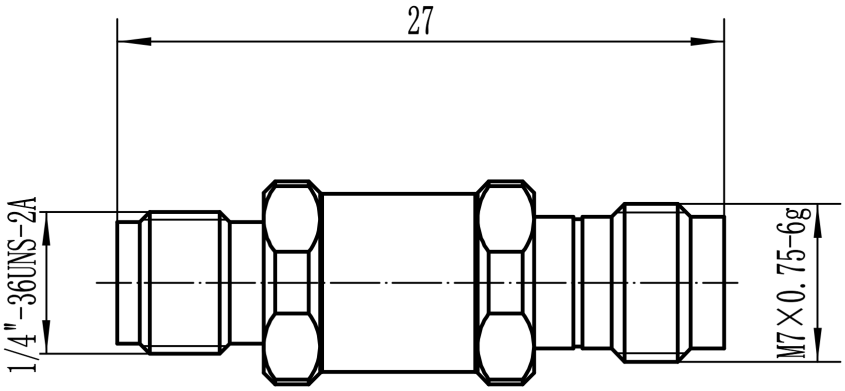


## 02 Electrical & Environmental

| | | | |
|---|---|---|---|
| **Frequency Range** | DC-34GHz | **Impedance** | 50 ohm |
| **VSWR** | 1.2 max | **Insertion Loss** | 0.23dB max , Typ 0.18dB |

## 03 Mechanical & Product Information

| | | | |
|---|---|---|---|
| **Product Number** | RA3410, H-Grade | **Connector** | 3.5mm Female to 2.4mm Female |
| **Connector Body** | Passivated stainless steel | **Shape/Mounting** | Straight, None |
| **Center Contact** | Gold plated beryllium copper | **Insulator** | PEI |
| **Dimension** | 27(L)mm | **Net Weight** | - |

## 04 Typical Test Data

