


2.4mm Female to 2.92mm(K,SK) Female, Adapter, RA4004WH DC-40GHzRight Angle,

01 Dimensions(mm) Tolerance±1%

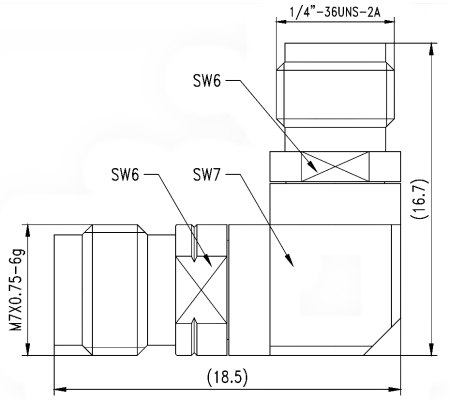

02 Electrical & Environmental

Frequency Range	DC-40GHz	**Impedance**	50 ohm
VSWR	1.25 max	**Insertion Loss**	0.30dB max ≤0.08√f(GHz)dB

03 Mechanical & Product Information

Product Number	RA4004WH, U-Grade	**Connector**	2.4mm Female to 2.92mm(K,SK) Female
Connector Body	Passivated stainless steel 316F	**Shape/Mounting**	Right Angle, None
Center Contact	1.27μm BeCu/Brass,Gold plating	**Insulator**	PTFE&PEI
Dimension	18.5(L)*16.7(W)mm	**Net Weight**	-

04 Typical Test Data

