
2.92mm(K,SK) Male to 2.4mm Female, Adapter, RA4007 DC-40GHz



01 Dimensions(mm) Tolerance±1%

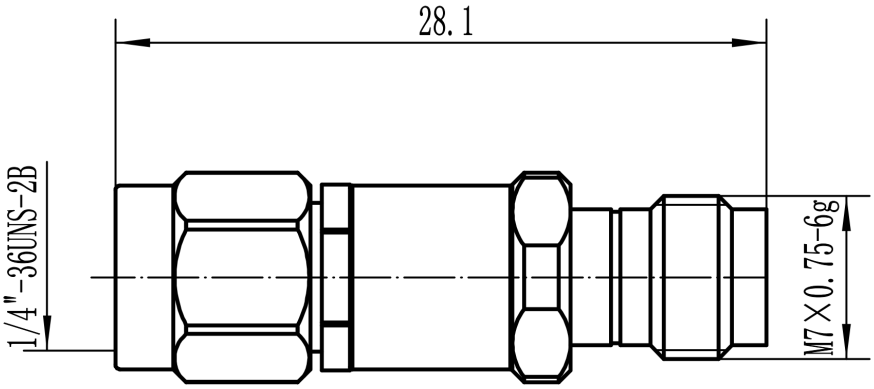

02 Electrical & Environmental

Frequency Range	DC-40GHz	**Impedance**	50 ohm
VSWR	1.2 max	**Insertion Loss**	0.29dB max , Typ 0.24dB

03 Mechanical & Product Information

Product Number	RA4007, H-Grade	**Connector**	2.92mm(K,SK) Male to 2.4mm Female
Connector Body	Passivated stainless steel	**Shape/Mounting**	Straight, None
Center Contact	Gold plated beryllium copper	**Insulator**	PEI
Dimension	28.1(L)mm	**Net Weight**	-

04 Typical Test Data

