


1.85mm Female to 2.92mm(K,SK) Male, Adapter, RA4009H DC-40GHz

01 Dimensions(mm) Tolerance±1%

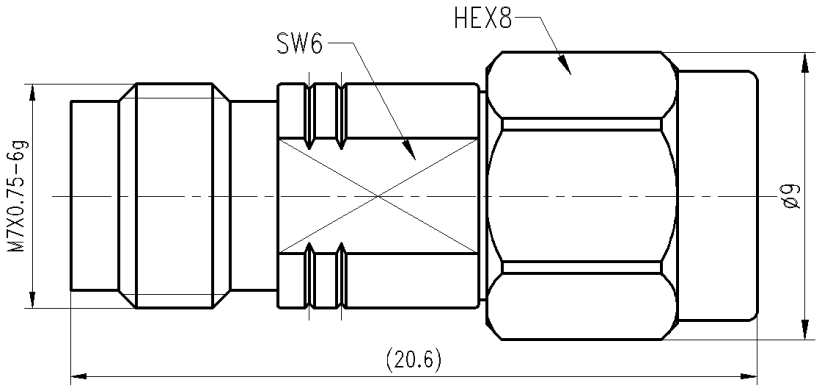


02 Electrical & Environmental

Frequency Range	DC-40GHz	**Impedance**	50 ohm
VSWR	1.15 max , Typ 1.1	**Insertion Loss**	0.25dB max , Typ 0.2dB; ≤0.04√f(GHz)dB

03 Mechanical & Product Information

Product Number	RA4009H, U-Grade	**Connector**	1.85mm Female to 2.92mm(K,SK) Male
Connector Body	Passivated stainless steel 316F	**Shape/Mounting**	Straight, None
Center Contact	1.27μm gold plated beryllium copper	**Insulator**	PEI
Dimension	20.6(L)*9(ϕ)mm	**Net Weight**	-

04 Typical Test Data

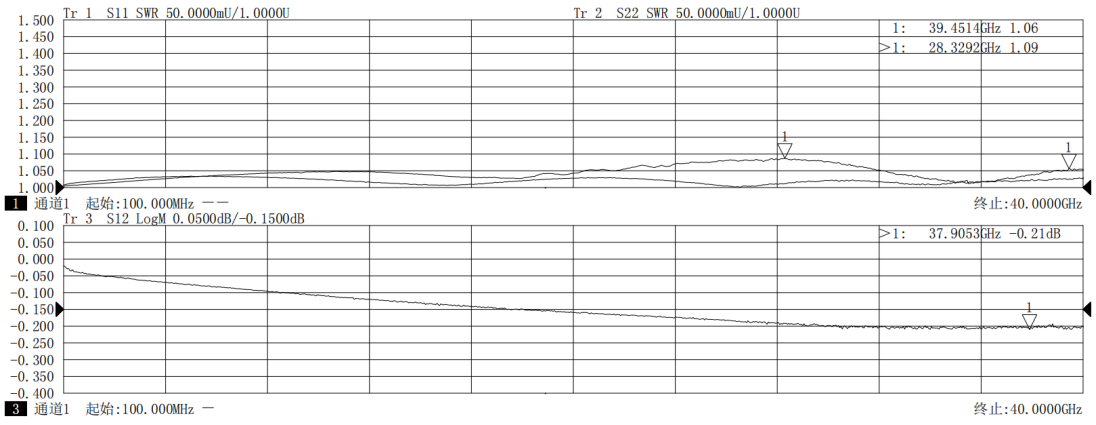

	扫描类型	起始频率	终止频率	扫描点数	中频带宽(Hz)	扫描时间(s)	端口1,2功率(dBm)
通道1	线性扫描	0.100000000GHz	40.000000000GHz	801	1000	0.779015	-5.0,-5.0