
2.4mm Female to SMP(GPO) Female, Adapter, RA4019H DC-40GHz



01 Dimensions(mm) Tolerance±1%

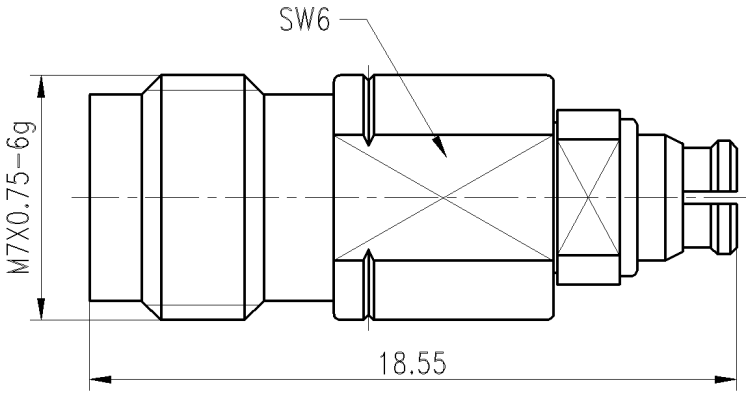

02 Electrical & Environmental

Frequency Range	DC-40GHz	**Impedance**	50 ohm
VSWR	1.25 max , Typ 1.15（互配测试）	**Insertion Loss**	0.40dB max ≤0.12√f(GHz)dB

03 Mechanical & Product Information

Product Number	RA4019H, U-Grade	**Connector**	2.4mm Female to SMP(GPO) Female
Connector Body	Passivated stainless steel 316F & BeCu	**Shape/Mounting**	Straight, None
Center Contact	1.27μm gold plated beryllium copper	**Insulator**	PEI
Dimension	18.55(L)mm	**Net Weight**	About 3.0g

04 Typical Test Data

