


2.4mm Male to 2.4mm Male, Adapter, RA5002H DC-50GHz

01 Dimensions(mm) Tolerance±1%

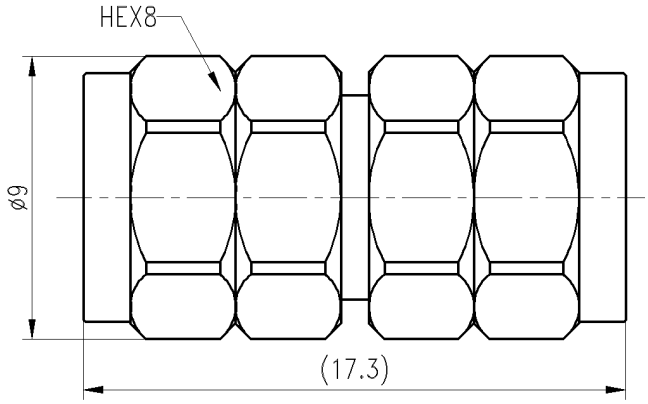

02 Electrical & Environmental

Frequency Range	DC-50GHz	**Impedance**	50 ohm
VSWR	1.15 max	**Insertion Loss**	0.20dB max ≤0.05√f(GHz)dB

03 Mechanical & Product Information

Product Number	RA5002H, U-Grade	**Connector**	2.4mm Male to 2.4mm Male
Connector Body	Passivated stainless steel 316F	**Shape/Mounting**	Straight, None
Center Contact	1.27μm gold plated brass	**Insulator**	PEI
Dimension	17.3(L)*9(ϕ)mm	**Net Weight**	About 4.2g

04 Typical Test Data

