


2.4mm Male to 2.4mm Male, Adapter, RA5002WH DC-50GHzRight Angle,

01 Dimensions(mm) Tolerance±1%

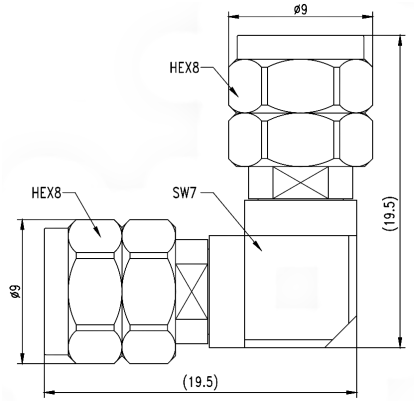

02 Electrical & Environmental

Frequency Range	DC-50GHz	**Impedance**	50 ohm
VSWR	1.25 max	**Insertion Loss**	0.50dB max ≤0.08√f(GHz)dB

03 Mechanical & Product Information

Product Number	RA5002WH, U-Grade	**Connector**	2.4mm Male to 2.4mm Male
Connector Body	Passivated stainless steel 316F	**Shape/Mounting**	Right Angle, None
Center Contact	1.27μm BeCu/Brass,Gold plating	**Insulator**	PTFE&PEI
Dimension	19.5(L)*19.5(W)*9(ϕ)mm	**Net Weight**	-

04 Typical Test Data

