


2.4mm Male to 2.4mm Female, Adapter, RA5003WH DC-50GHzRight Angle,

01 Dimensions(mm) Tolerance±1%

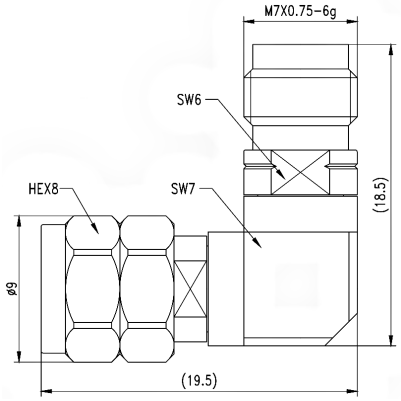


02 Electrical & Environmental

Frequency Range	DC-50GHz	**Impedance**	50 ohm
VSWR	1.25 max	**Insertion Loss**	0.45dB max ≤0.08√f(GHz)dB

03 Mechanical & Product Information

Product Number	RA5003WH, U-Grade	**Connector**	2.4mm Male to 2.4mm Female
Connector Body	Passivated stainless steel 316F	**Shape/Mounting**	Right Angle, None
Center Contact	1.27μm BeCu/Brass,Gold plating	**Insulator**	PTFE&PEI
Dimension	19.5(L)*18.5(W)*9(ϕ)mm	**Net Weight**	-

04 Typical Test Data

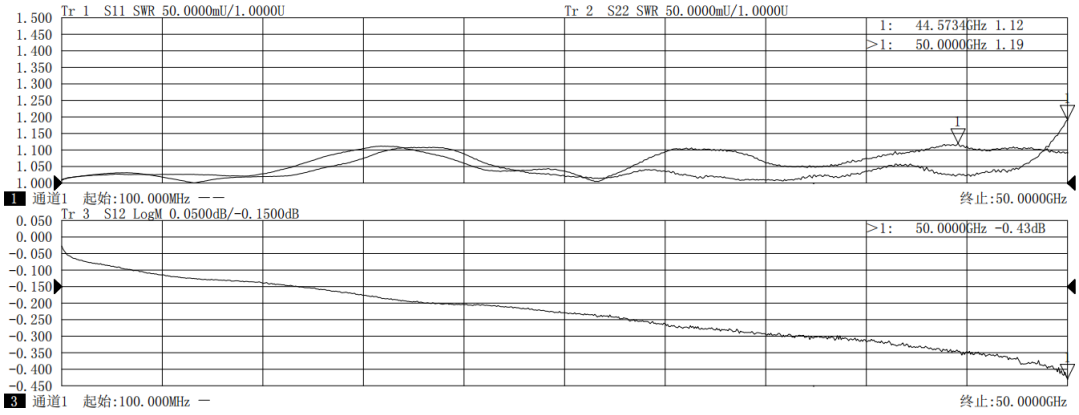

	扫描类型	起始频率	终止频率	扫描点数	中频带宽(Hz)	扫描时间(s)	端口1,2功率(dBm)
通道1	线性扫描	0.100000000GHz	50.000000000GHz	801	1000	0.789015	-5.0,-5.0