
# N Female 50Ω to N Female 75Ω, RF Matching Pads, RAMP03N06 DC-3GHz



## 01 Dimensions(mm) Tolerance±1%

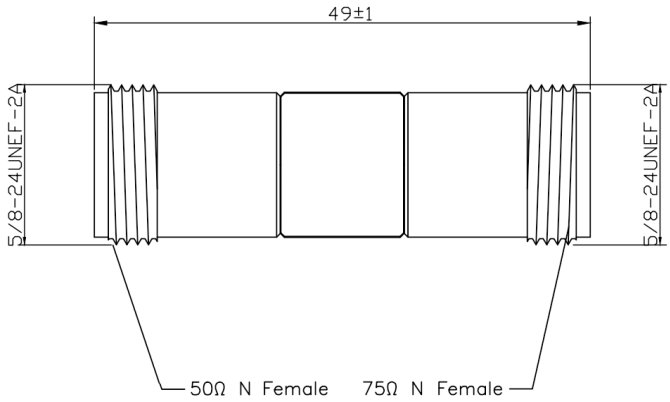


## 02 Electrical & Environmental

| | | | |
|---|---|---|---|
| **Frequency Range** | DC-3GHz | **Impedance** | 50Ω/75Ω |
| **VSWR** | 1.25 max | **Insertion Loss** | 6.30dB max (Including theoretical loss 5.7dB) |

## 03 Mechanical & Product Information

| | | | |
|---|---|---|---|
| **Product Number** | RAMP03N06, P-Grade | **Connector** | N Female 50Ω to N Female 75Ω |
| **Connector Body** | Passivated stainless steel 303 | **Shape/Mounting** | Straight, None |
| **Center Contact** | Gold plated beryllium copper | **Insulator** | PTFE |
| **Dimension** | 49±1(L)mm | **Net Weight** | About 50.0g |

## 04 Typical Test Data

